


AREVA PRIME 15W

AREVA PRIME ROUND DOWNLIGHT

Indoor Luminaire

Product Code:

LARP01R015XC / LARP01R015XN / LARP01R015XW
15W - 1500lm - 6500K - CRI>80 Ra - Beam Angle - 100°



Technical Specifications


Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	220 ~ 240 VAC, 50Hz
Rated Input Wattage	15W ± 10%
Rated Input Current	0.068 Amp (Nominal)
Power Factor	≥0.90
ATHD	<15%
Rated Luminous Flux	1500 lm / 1425 lm / 1350 lm (tolerance as per BIS)
Rated Luminaire Efficacy	100 lm/W / 95 lm/W / 90 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Beam Angle	100° (within the permissible limits)
Driver Efficiency	>85%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Aluminium Housing with Black/White Powder Coating
Lens / Reflector	PC Diffuser
Mounting	Recessed

Protections

Over Voltage Protection	Withstand upto 440V/AC for 4 Hrs.
Surge Protection	±4.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	IK02
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Light Distribution

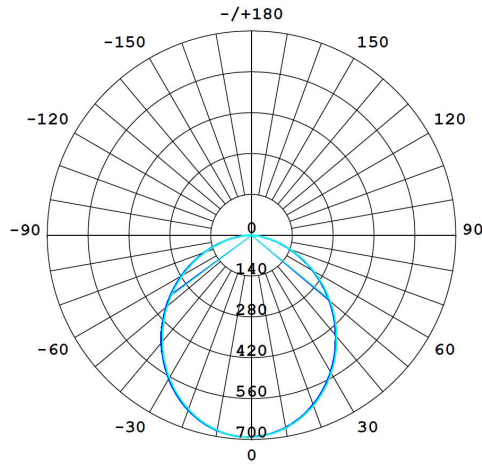


UGR Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions	Viewed crosswise					Viewed endwise						
x = 2H y = 2H	27.4	28.9	27.7	29.1	29.3	27.5	28.9	27.7	29.1	29.3		
3H	28.7	30.1	29.0	30.3	30.6	28.7	30.1	29.0	30.3	30.6		
4H	29.2	30.5	29.5	30.7	31.0	29.2	30.5	29.5	30.8	31.0		
6H	29.4	30.7	29.8	30.9	31.2	29.5	30.7	29.8	31.0	31.2		
8H	29.5	30.6	29.8	30.9	31.2	29.5	30.7	29.8	31.0	31.3		
12H	29.4	30.6	29.8	30.9	31.2	29.5	30.6	29.8	30.9	31.2		
4H	2H	28.0	29.3	28.3	29.5	29.8	28.0	29.3	28.3	29.5	29.8	
3H	29.4	30.5	29.8	30.8	31.1	31.2	29.4	30.6	29.8	30.8	31.2	
4H	30.0	31.0	30.3	31.3	31.6	31.7	30.0	31.0	30.4	31.3	31.7	
6H	30.3	31.2	30.7	31.6	31.9	32.0	30.3	31.3	30.7	31.6	32.0	
8H	30.4	31.2	30.8	31.6	32.0	32.1	30.4	31.3	30.8	31.6	32.0	
12H	30.4	31.2	30.8	31.5	31.9	32.2	30.4	31.2	30.8	31.6	32.0	
8H	4H	30.1	31.0	30.5	31.4	31.7	31.8	30.1	31.0	30.6	31.4	31.8
6H	30.6	31.3	31.0	31.7	32.1	32.2	30.6	31.3	31.0	31.7	32.1	
8H	30.7	31.3	31.1	31.7	32.2	32.3	30.7	31.3	31.2	31.8	32.2	
12H	30.7	31.2	31.2	31.7	32.2	32.3	30.7	31.3	31.2	31.7	32.2	
12H	4H	30.1	30.9	30.5	31.3	31.7	31.8	30.1	30.9	30.6	31.3	31.7
6H	30.6	31.2	31.0	31.6	32.1	32.2	30.6	31.2	31.1	31.7	32.1	
8H	30.7	31.2	31.2	31.7	32.2	32.3	30.7	31.3	31.2	31.7	32.2	
Variations with the observer position at spacings (CIE Pub.117) :												
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2						
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3						
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3						

Product Dimensions (DiaxH)

Ø 120 x 28mm (Tol. ± 5 mm), Cutout Size 105mm

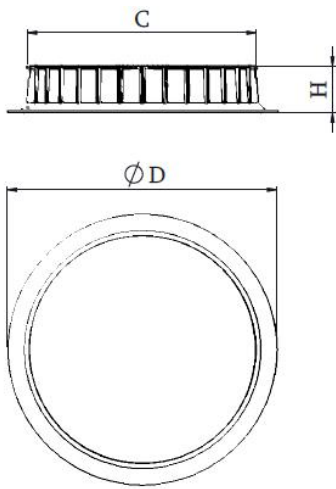

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.