



## BATH + LIGHT

### WALL LIGHT 12W

Xcellent LED UP & Down Wall Light

Outdoor Luminaire

Product Code:

LWWL02R206XW

12W - 960lm - 3000K - CRI>70 Ra - Beam Angle - Asymmetric



### Technical Specifications

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	220-240 V AC
Rated Input Wattage	12W ± 10%
Rated Input Current	0.060 Amp (Nominal)
Power Factor	>0.9
ATHD	<20%
Rated Luminous Flux	960 lm (tolerance as per BIS)
Rated Luminaire Efficacy	80 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>70 Ra
Beam Angle	Asymmetric
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Aluminium Die Cast with Powder Coating
Lens / Reflector	Opal Polycarbonate Diffuser
Mounting	Surface/Wall


### Protections

Over Voltage Protection	300 VAC upto 20 Min.
Surge Protection	±2.0KV
Protection Class	Class I
Ingress Protection (IP Rating)	IP54
Impact Protection (IK Rating)	IK07
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

## Product Dimensions (L x W x H)

140 X 127 X 141 mm (Tol.±5 mm)

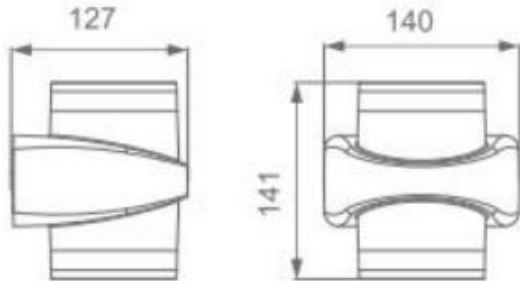

## Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other outdoor applications.