



BATH + LIGHT



ERIS 02 5W


ERIS DEEP RECESSED SPOT LIGHT

Indoor Luminaire

Product Code:

LERS02R005XC / LERS02R005XN / LERS02R005XW

5W - 375lm - 6500K - CRI>90 Ra - Beam Angle 24°



Technical Specifications


Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	230 VAC, 50Hz
Rated Input Wattage	5W ± 10%
Rated Input Current	0.025 Amp (Nominal)
Power Factor	≥0.90
ATHD	<20%
Rated Luminous Flux	375 lm / 350 lm / 325 lm (tolerance as per BIS)
Rated Luminaire Efficacy	75 lm/W / 70 lm/W / 65 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>90 Ra
Beam Angle	24° (within the permissible limits)
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Aluminium Housing with White/Black Powder Coating
Lens / Reflector	Reflector
Mounting	Recess

Protections

Over Voltage Protection	Withstand upto 440V/AC for 4 Hrs.
Surge Protection	±4.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	IK02
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Light Distribution

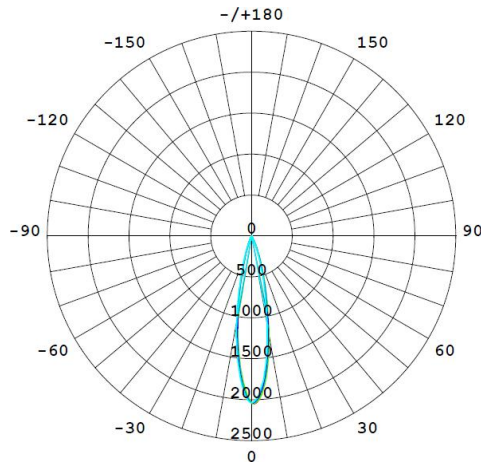


UGR Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.7	13.4	12.9	13.5	13.7	13.1	13.8	13.3	13.9	14.1
3H	13.7	14.3	14.0	14.5	14.7	14.1	14.7	14.3	14.9	15.0
4H	14.0	14.6	14.3	14.8	15.0	14.3	14.9	14.6	15.1	15.3
6H	14.1	14.6	14.3	14.8	15.1	14.3	14.9	14.6	15.1	15.4
8H	14.0	14.6	14.3	14.8	15.1	14.3	14.9	14.6	15.1	15.3
12H	14.0	14.5	14.3	14.8	15.0	14.3	14.8	14.6	15.0	15.3
4H 2H	13.3	13.9	13.5	14.1	14.3	13.6	14.2	13.8	14.4	14.6
3H	14.4	14.9	14.7	15.2	15.4	14.7	15.2	15.0	15.4	15.7
4H	14.7	15.2	15.1	15.5	15.8	15.0	15.4	15.3	15.7	16.0
6H	14.8	15.2	15.2	15.6	15.9	15.0	15.4	15.4	15.8	16.1
8H	14.8	15.2	15.2	15.5	15.9	15.0	15.4	15.4	15.7	16.1
12H	14.7	15.1	15.1	15.4	15.8	14.9	15.3	15.3	15.7	16.0
8H 4H	14.8	15.2	15.2	15.5	15.9	15.0	15.4	15.4	15.8	16.1
6H	14.9	15.2	15.3	15.6	16.0	15.1	15.4	15.5	15.8	16.2
8H	14.8	15.1	15.3	15.6	16.0	15.0	15.3	15.5	15.7	16.2
12H	14.8	15.0	15.2	15.5	15.9	15.0	15.2	15.4	15.7	16.1
12H 4H	14.7	15.1	15.2	15.5	15.9	15.0	15.3	15.4	15.7	16.1
6H	14.8	15.1	15.3	15.5	16.0	15.0	15.3	15.5	15.7	16.2
8H	14.8	15.0	15.3	15.5	16.0	15.0	15.2	15.5	15.7	16.1
Variations with the observer position at spacings (CIE Pub.117):										
S = 1.0H	+ 0.4 / - 0.4					+ 0.3 / - 0.5				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.5				
2.0H	+ 0.4 / - 0.6					+ 0.6 / - 0.6				

.Product Dimensions (Dia.xH)

Ø55 X 100 mm (Tol. ± 5 mm), Cutout Dia. Ø47 mm

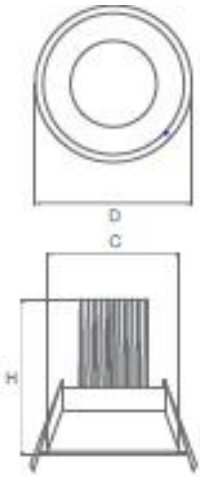

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.