

### ROMANTICA 10W


ROMANTICA BOLLARD

Projector Lights

Product Code:

350.44L10H.NGG

10W - 700lm - 3000K - CRI>70 Ra



### Technical Specifications

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	230 VAC, 50Hz
Rated Input Wattage	10W ± 10%
Rated Input Current	0.050 Amp.
Power Factor	≥0.9
ATHD	<30%
Rated Luminous Flux	700 lm (tolerance as per BIS)
Rated Luminaire Efficacy	70 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>70 Ra
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Die Cast Aluminium with Black Powder Coating
Lens / Reflector	Frosted Polycarbonate Diffuser
Mounting	Surface

### Protections


Over Voltage Protection	Withstand upto 300V/AC for 20 Min.
Surge Protection	±2.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP43
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided



All technical data is subject to industry-standard tolerances.

## Product Dimensions (Dia x H)

Ø250 X 1190 mm

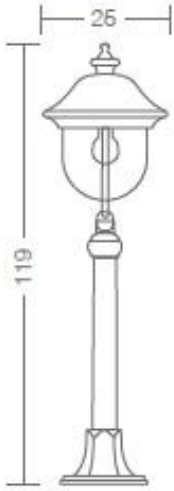

## Applications

Façade lighting, Accent lighting, Atriums and columns,  
Architectural lighting, Varied beam angle applications