



## BATH + LIGHT

### **SPIKE LIGHT 8W**

ELECTRA LED SPIKE LIGHT

**Outdoor Luminaire**

**Product Code:**

LSPK04R108XW

8W - 560lm - 3000K - CRI>70 Ra - Beam Angle - 36°



### **Technical Specifications**

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	230 VAC, 50Hz
Rated Input Wattage	8W ± 10%
Rated Input Current	0.040 Amp (Nominal)
Power Factor	≥0.90
Rated Luminous Flux	560 lm (tolerance as per BIS)
Rated Luminaire Efficacy	70 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>70 Ra
Beam Angle	36° (within the permissible limits)
Driver Efficiency	≥85%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Aluminium Die Cast with Matt Grey Finish Powder Coating
Lens / Reflector	Aluminium Anodized Reflector and Transparent Tempered Glass Diffuser
Mounting	Ground

### **Protections**


Over Voltage Protection	Withstand upto 300V/AC for 20 min.
Surge Protection	±2.5KV
Protection Class	Class I
Ingress Protection (IP Rating)	IP65
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

With our continuous efforts to upgrade the technology/product, all product specifications and data are subject to change without prior notice. We always try to maintain the accuracy of our product images, but due to different viewing conditions, the colors may vary. Images are only for indicative purpose.

## Product Dimensions (Dia. X L x H)

Ø85 X 139 X 354 mm (tol.±5 mm)

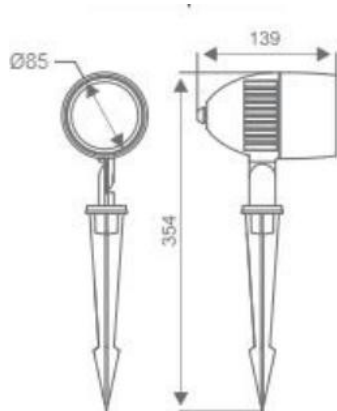

## Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.